


TE-SERIES PHOTODIODE / RECEIVER

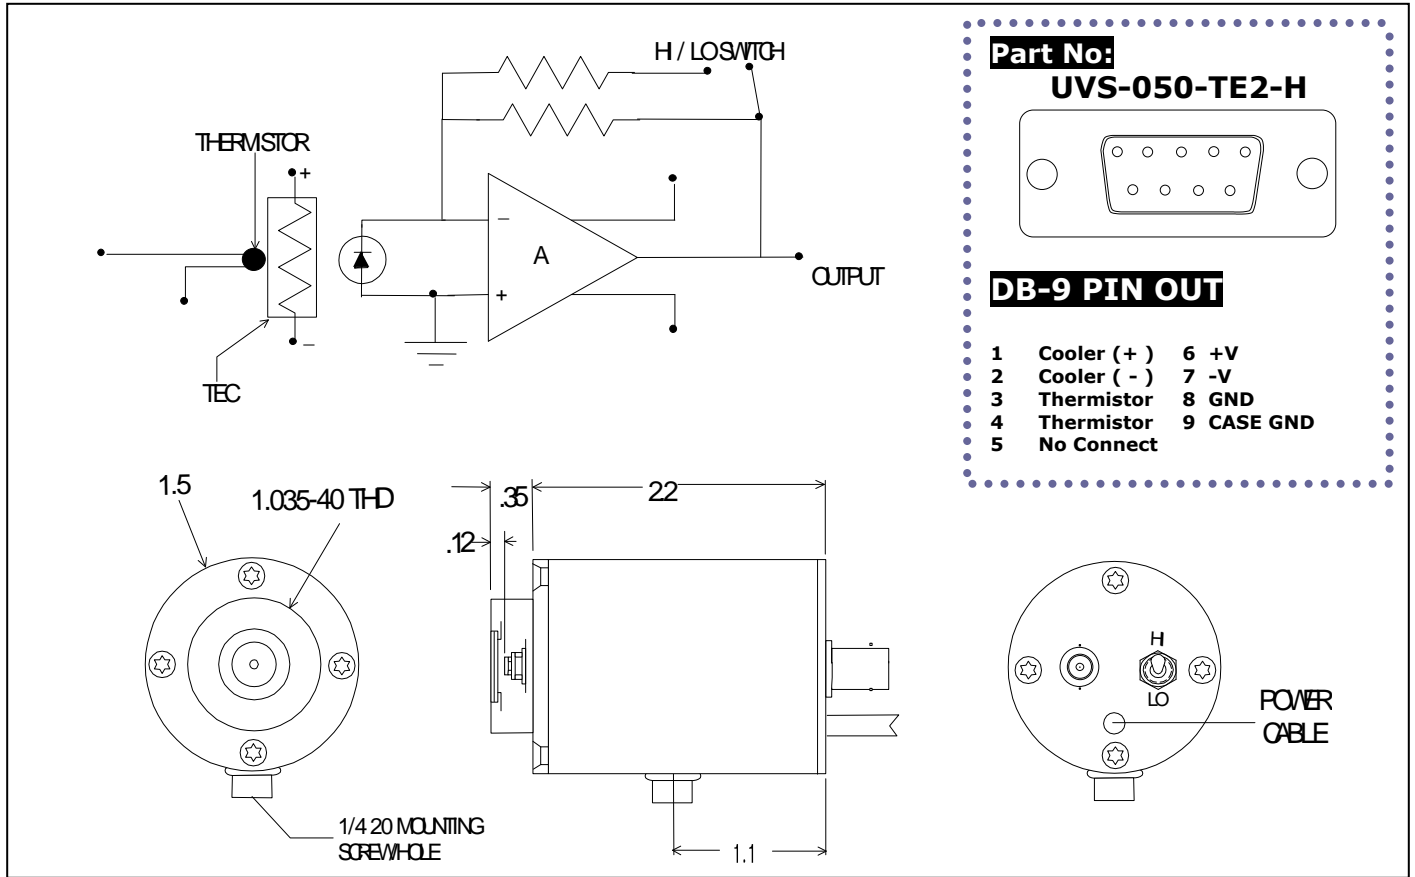

Application Note

This unit is a high performance photodiode/receiver operated with a thermoelectric cooler for stabilization/cooling with a dual gain FET input transimpedance amplifier. The output voltage is proportional to the input signal current: $V_{out} = I_{signal} \cdot R_f$. The PD/AMP is a DC coupled dual gain system. Care should be taken in shielding the unit from stray light during operation to prevent saturation of the amplifier (and potential failure).

SPECIFICATIONS

Detector Type	5 mm dia UV Silicon Photodiode	
Operating Temperature- °C	22 @ $I_{tech} = 0.0 A$	- 30 @ $I_{tech} = 0.5 A$
Operating Wavelength- μm	0.2 - 1.0	0.2 - 1.0
Responsivity- V/W @ 750nm	$0.6 \times 10^9 / 10^8$	$0.6 \times 10^9 / 10^8$
Noise- V/Hz ^{1/2}	$12 \times 10^{-6} / 1.0 \times 10^{-6}$	$5.0 \times 10^{-6} / 1.0 \times 10^{-6}$
NEP- W/Hz ^{1/2} @ 750nm	$< 2.0 \times 10^{-14}$	$< 1.0 \times 10^{-14}$
Bandwidth (-3dB)- Hz, typ	DC - 500 / 2k	DC - 500 / 2k
Power Requirements	+/- 9 VDC to +/- 15 VDC	
Connections	BNC signal output. Shielded power cable terminated with a DB-9 connector directly couples the unit with the PS/TC -1 Low Noise Power Supply / Controller.	

RoHS Compliant