
**Features**

- 400 mm<sup>2</sup> PSD
- Dual-axis, duo-lateral
- High position resolution
- High NIR sensitivity

**Description**

Square active area position sensing PIN photodiode with 400 mm<sup>2</sup> active area. Ceramic carrier type non-hermetic package with clear glass window.

**Application**


- Laser positioning
- Precision photometry
- Instrumentation
- Medical equipment
- Pulsed light sensor

**RoHS**

2002/95/EC


**Absolute maximum ratings**

Symbol	Parameter	Min	Max	Unit
T <sub>STG</sub>	Storage temp	-20	80	°C
T <sub>OP</sub>	Operating temp	-20	60	°C
V <sub>max</sub>	Max reverse voltage	80		V
I <sub>PEAK</sub>	Peak DC current		10	mA

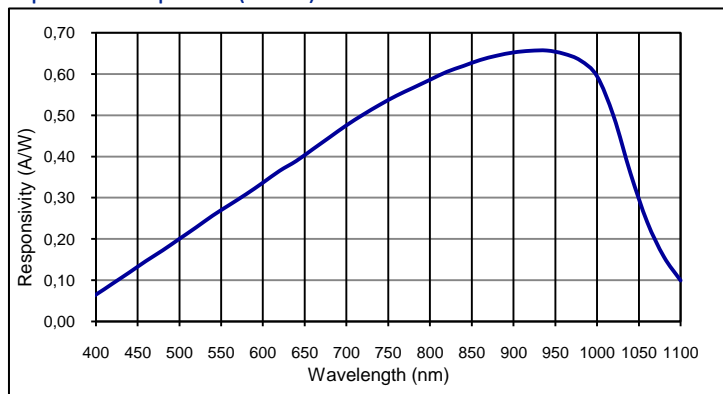**Spectral response (23 °C)**

**Electro-optical characteristics @ 23 °C**

Symbol	Characteristic	Test Condition	Min	Typ	Max	Unit
	Active area		20 x 20			mm
	Active area		400			mm <sup>2</sup>
I <sub>D</sub>	Dark current	V <sub>R</sub> = 10 V		800	2.000	nA
C	Capacitance	V <sub>R</sub> = 0 V		1.000		pF
		V <sub>R</sub> = 10 V		300		pF
	Responsivity	λ = 633 nm		0.4		A/W
		λ = 850 nm		0.62		A/W
t <sub>R</sub>	Rise time	V <sub>R</sub> = 10 V; λ = 865 nm; R <sub>L</sub> = 50 Ω		4000		ns
	Interelectrode Resistance	E = 0 lx		12		kΩ
	Noise lim. resolution	λ = 632 nm; P = 0.5 μW, spot dia. 0.5 mm		0.3		μm
	Position detection error	λ = 632 nm; P = 0.5 μW, spot dia. 0.5 mm		± 1		%
V <sub>BR</sub>	Breakdown voltage	I <sub>R</sub> = 2 μA		100		V


**European, International Sales:**


First Sensor AG  
 Peter-Behrens-Strasse 15  
 12459 Berlin  
 Germany  
 T +49 30 6399 2399  
 F +49 30 639923-752  
 sales.opto@first-sensor.com


**USA:**


First Sensor Inc.  
 5700 Corsa Avenue #105  
 Westlake Village  
 CA 91362 USA  
 T +1 818 706 3400  
 F +1 818 889 7053  
 sales.us@first-sensor.com


Quantum efficiency (23 °C)

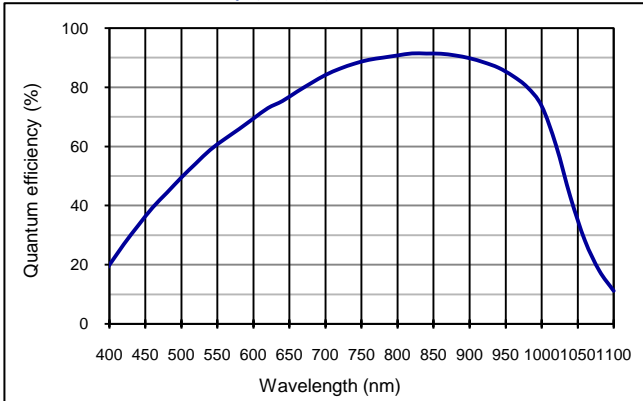

Capacitance as fct of reverse bias (23 °C)

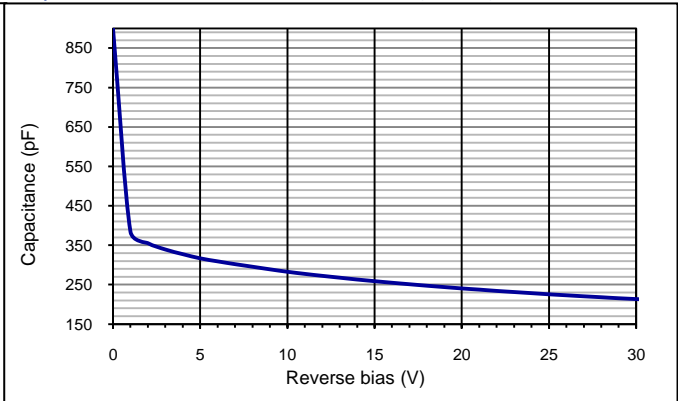

Dark current as fct of bias (23 °C)

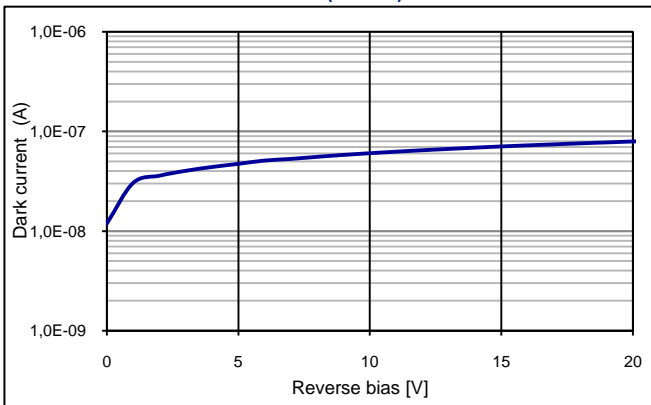

European, International Sales:




First Sensor AG  
 Peter-Behrens-Strasse 15  
 12459 Berlin  
 Germany  
 T +49 30 6399 2399  
 F +49 30 639923-752  
 sales.opto@first-sensor.com

USA:



First Sensor Inc.  
 5700 Corsa Avenue #105  
 Westlake Village  
 CA 91362 USA  
 T +1 818 706 3400  
 F +1 818 889 7053  
 sales.us@first-sensor.com

Technical Drawing, Package: CERpin

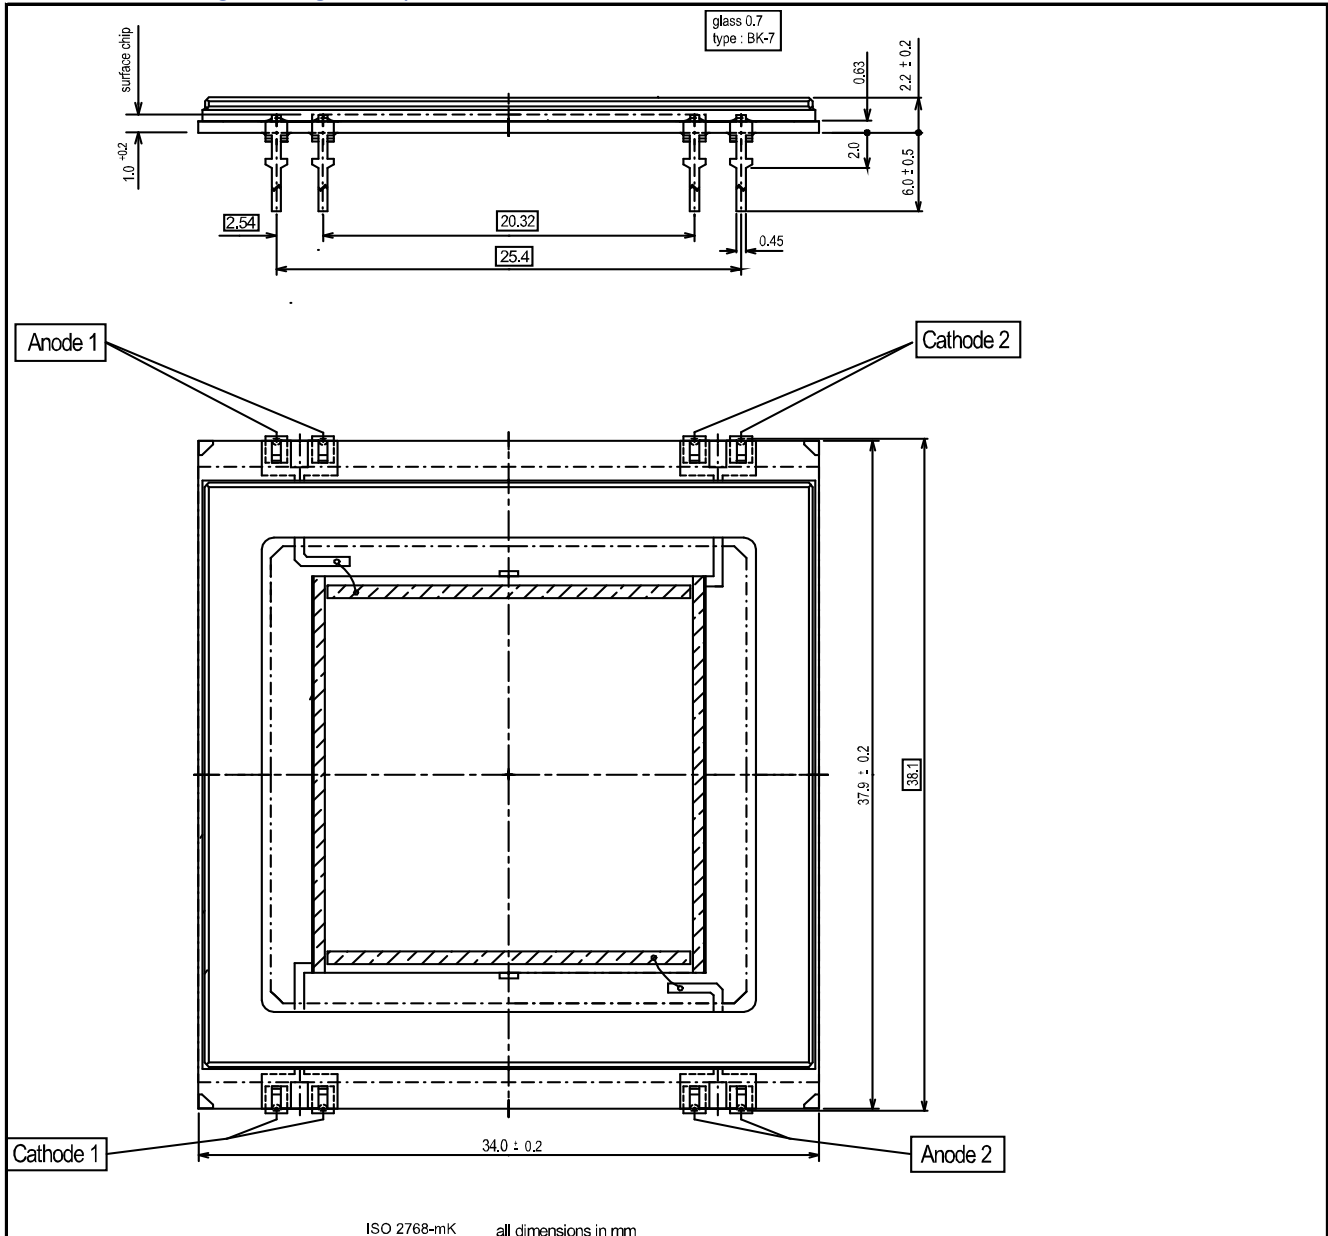

Package dimension:

Small quantities: Foam pad, boxed (12 cm x 16.5 cm)

Handling:

Please refer to document "Instructions for handling and processing"

Disclaimer: Due to our strive for continuous improvement, specifications are subject to change within our PCN policy according to JESD46C.

European, International Sales:



First Sensor AG  
 Peter-Behrens-Strasse 15  
 12459 Berlin  
 Germany  
 T +49 30 6399 2399  
 F +49 30 639923-752  
 sales.opto@first-sensor.com

USA:



First Sensor Inc.  
 5700 Corsa Avenue #105  
 Westlake Village  
 CA 91362 USA  
 T +1 818 706 3400  
 F +1 818 889 7053  
 sales.us@first-sensor.com