
**Features**

- 33mm<sup>2</sup> PIN detector
- Low dark current
- High shunt resistance
- High sensitivity

**Description**

Square active area PIN photodiode with 33 mm<sup>2</sup> active area. Metal can type hermetic TO8 package with clear glass window.

**Application**

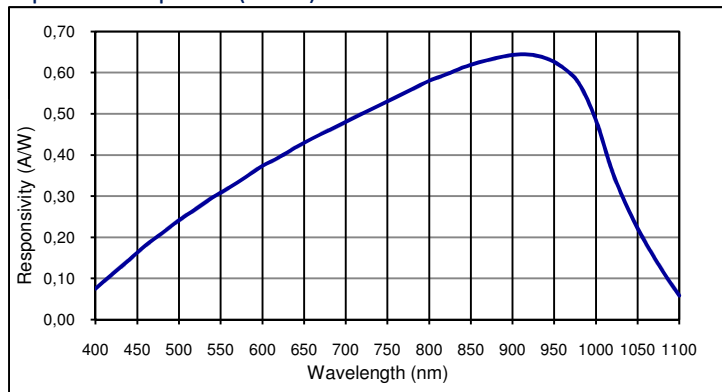
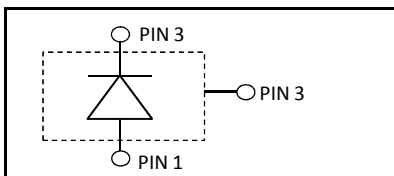
- Precision photometry
- Bar code readers
- Medical equipment
- Pulsed light sensor

**RoHS**

2002/95/EC


**Absolute maximum ratings**

Symbol	Parameter	Min	Max	Unit
T <sub>STG</sub>	Storage temp	-55	125	°C
T <sub>OP</sub>	Operating temp	-40	100	°C
V <sub>max</sub>	Max reverse voltage		20	V
I <sub>PEAK</sub>	Peak DC current		10	mA

**Spectral response (23 °C)**

**Schematic**

**Electro-optical characteristics @ 23 °C**

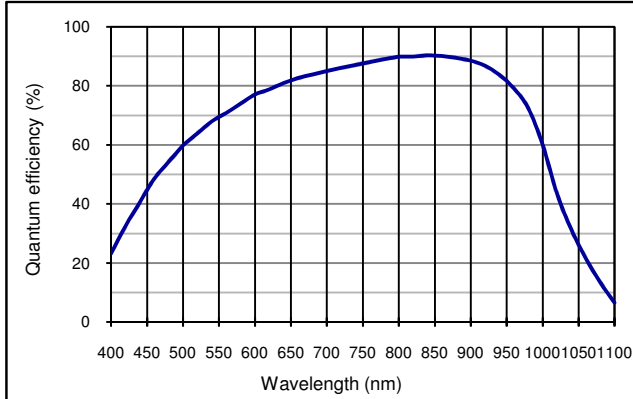
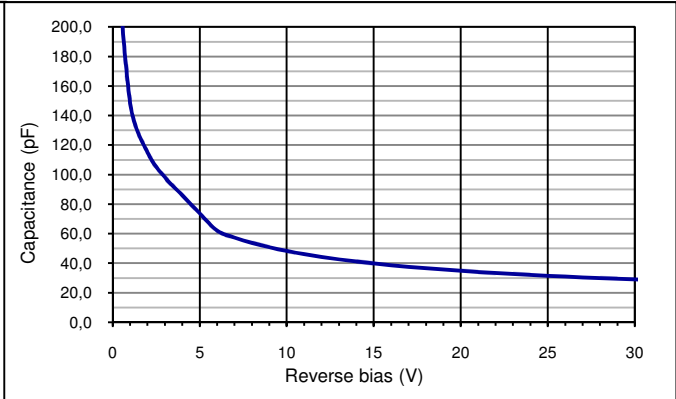
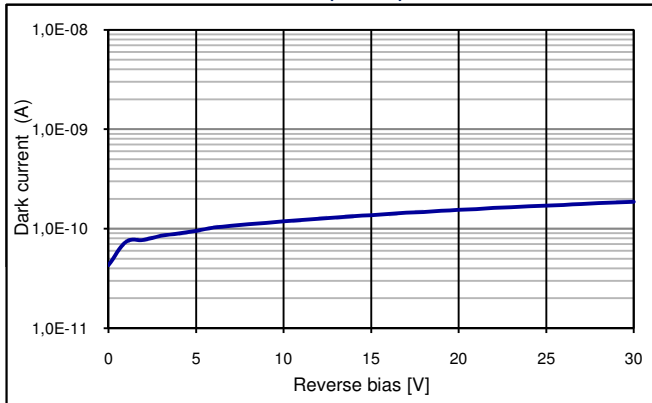
Symbol	Characteristic	Test Condition	Min	Typ	Max	Unit
	Active area		5694 x 5694			µm
	Active area		33			mm <sup>2</sup>
I <sub>D</sub>	Dark current	V <sub>R</sub> = 10 V		0.4	0.6	nA
C	Capacitance	V <sub>R</sub> = 0 V		280		pF
		V <sub>R</sub> = 10 V		50		pF
	Responsivity	λ = 632 nm		0.4		A/W
		λ = 900 nm		0.64		A/W
t <sub>R</sub>	Rise time	V <sub>R</sub> = 0 V; λ = 850 nm; R <sub>L</sub> = 50 Ω		2000		ns
		V <sub>R</sub> = 10 V; λ = 850 nm; R <sub>L</sub> = 50 Ω		25		ns
	Shunt Resistance	V <sub>R</sub> = 10 mV		500		MΩ
	N.E.P.	V <sub>R</sub> = 10 V; λ = 900 nm		1.8 E-14		W/√Hz
V <sub>BR</sub>	Breakdown voltage	I <sub>R</sub> = 2 µA	30			V

**European, International Sales:**


First Sensor AG  
 Peter-Behrens-Strasse 15  
 12459 Berlin  
 Germany  
 Phone: +49-30-6399-2399  
 Fax: +49-30-6399-23752  
 E-Mail: sales.opto@first-sensor.com

**USA:**


Pacific Silicon Sensor, Inc.  
 5700 Corsa Avenue #105  
 Westlake Village  
 CA 91362 USA  
 Phone: +1-818-706-3400  
 Fax: +1-818-889-7053  
 E-Mail: sales@pacific-sensor.com

**Quantum efficiency (23 °C)**

**Capacitance as fct of reverse bias (23 °C)**

**Dark current as fct of bias (23 °C)**

**Package dimension:**

Small quantities: Foam pad, boxed (12 cm x 16.5 cm)

**Handling:**

Please refer to document "Instructions for handling and processing"

Disclaimer: Due to our strive for continuous improvement, specifications are subject to change within our PCN policy according to JESD46C.

**European, International Sales:**


First Sensor AG  
 Peter-Behrens-Strasse 15  
 12459 Berlin  
 Germany  
 Phone: +49-30-6399-2399  
 Fax: +49-30-6399-23752  
 E-Mail: sales.opto@first-sensor.com

**USA:**


Pacific Silicon Sensor, Inc.  
 5700 Corsa Avenue #105  
 Westlake Village  
 CA 91362 USA  
 Phone: +1-818-706-3400  
 Fax: +1-818-889-7053  
 E-Mail: sales@pacific-sensor.com